

# Water chiller

# TT-14'500 H

**Air cooled water chiller with integrated heating capability for the water circuit**  
**Mobile unit for individual machine or multi-machine application**

**For water temperatures from +10°C up to +40°C,**  
**at ambient temperatures up to +45°C**



- Closed water circuit
- No useless water consumption

**Electronic flow control**  
**with digital readout**

## Operating principle

The unit is equipped with a 50 l corrosion resistant water tank. The cooling compressor cools the water content to the required temperature. The resultant heat generated leaves the unit through the side panels. Should the water temperature be too low, the heating element will be activated automatically. The sealless corrosion free bronze-pump ensures years of problem-free use.

- All components are made of corrosion resistant stainless steel or bronze.
- Digital flow indication with control of the minimum flow rates in l/m, or English/American gal./m.
- Self-optimizing microprocessor controller with digital display of the set and actual value. Indication in 1/10°C range. Temperature display can be set to readout °C or °F.
- Long life expectancy due to the electronic control of the compressors operating time.
- If the water in the system does not reach the required temperature, the built-in heating will be activated automatically.
- Automatic or manual water refill.
- Automatic level control with pre-warning at low water level.
- Audible alarm and visual indication in case of failure.
- Castors.

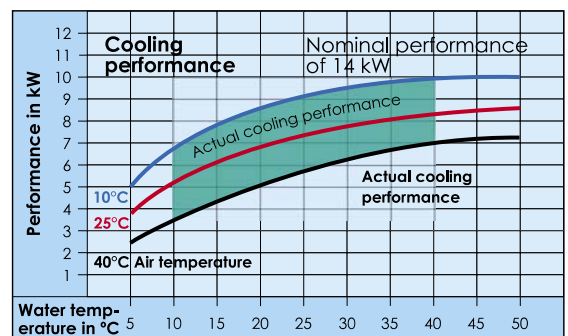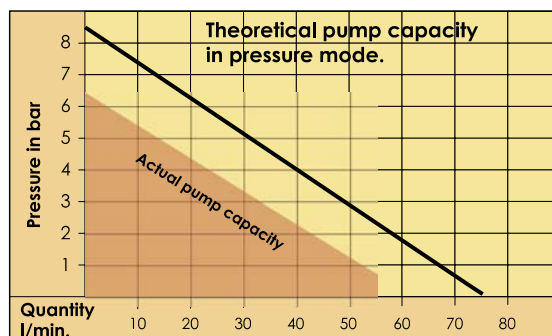

**TOOL-TEMP**<sup>®</sup>

## TOOL-TEMP AG

Industriestrasse 30

CH-8583 Sulgen

Schweiz - Suisse - Switzerland

Tel.: +41 (0)71 644 77 77

Fax: +41 (0)71 644 77 00

E-Mail: [info@tool-temp.ch](mailto:info@tool-temp.ch)

Internet: [www.tool-temp.ch](http://www.tool-temp.ch)

## Technical Data

<b>Temperature control</b>	Self-optimizing microprocessor controller MP-888 with digital display of the set and actual value. Automatic temperature monitoring.
<b>Cooling capacity</b> <i>Nominal capacity</i>	<b>14 kW – see diagram</b>
<b>Temperature range</b> <i>Circulating water</i>	+10°C bis +40°C
<i>Air temperature</i>	+2°C bis +45°C
<b>Heating</b>	6 kW, manual setting
<b>Content water tank</b>	approx. 50 l
<b>Coolant</b>	R-134a
<b>Pump capacity</b>	max. 8,5 bar / max. 75 l/min – see pump diagram
<b>Compressor</b>	Hermetically sealed
<b>Condenser</b>	Air cooled, air inlet located at the front, blow out located on the side/rear
<b>Air volume</b>	2'850 m <sup>3</sup> /h
<b>Power consumption</b>	<b>approx. 8 kW</b> (heating mode approx. 8 kW, cooling mode approx. 5 kW)
<b>Connections</b> <i>TO-/FROM mould</i>	3/4" BSP female thread
<i>Automatic water refill</i>	3/8" BSP female thread
<b>Dimensions</b>	Length: 980 mm x Width: 660 mm x Height: 1'300 mm incl. castors
<b>Noise level</b> <b>(in 3 m distance)</b>	68 dBA
<b>Weight</b>	190 kg empty
<b>Colour</b>	Silver grey RAL 7001 Option: Stainless steel case, not varnished



### TT-14'500 H/WK:

The same model is also available as water cooled version.

Required cooling water: minimum 1,5 bar water pressure.

With cooling tower water (approx. 30°C) approx. 20 - 40 l/min cooling water consumption

With tap water (approx. 10 - 15°C) approx. 10 - 20 l/min cooling water consumption

## Electronic temperature controller MP-888

The electronic controller can be adjusted to indicate °C or °F. The higher turning on point and lower turning off point (hysteresis) of the temperature band can be adapted. Due to this, the time range between the start and stop point of the compressor is wider and the compressor has a longer lifetime.

— Set temperature (required temperature)  
 Adjustable in  $\frac{1}{10}^\circ$  range

— Actual temperature (effective temperature) displayed in  $\frac{1}{10}^\circ$  range

— Indication of flow rate in different units, possible are litres per minute with  $\frac{1}{10}$  litres display. Switchable from English to American gallons. As soon as the flow falls below a minimum, the alarm is activated.

**Flow control with automatic or manual pre-adjusted mode:**  
 Automatic: The electronic flow control measures the actual flow, generates automatically a minimum flow and as soon as the flow falls below this value, the alarm will be activated.  
 Manual: The minimum flow can be adjusted manually. As soon as the flow falls below this value, the alarm will be activated.



**TOOL-TEMP**®