
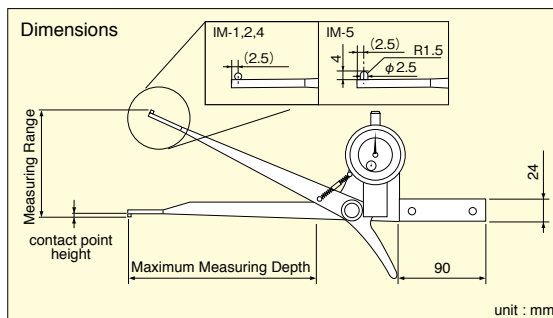


Caliper Gauge

As to internal caliper gauge IM-880 series, the distance between contact points facing outside is firstly set at standard dimension with ring gauge or micrometer. Then, it is measured by inserting contact point into internal dimension part to be measured after its outer dial of which moves together with rotated bezel is set at "0". The displacement of indicator from "0" point of outer dial is to be measured at that time. The value adding to the read displacement to standard dimension or deducting it from standard dimension is the dimension of internal diameter. This series attaches spare contact point which can set accurate dimension corresponding to size of internal dimension. External caliper gauge is opposite, namely reading the value by holding work piece with 2 contact points facing outside.

Internal Dial Caliper Gauge

- These gauges are designed for use in measuring deep internal diameter of bores of castings etc, and for internal reading in fabrications. Clearance has been provided for use in recessed bores. The convenient retraction lever allows one-hand operation.

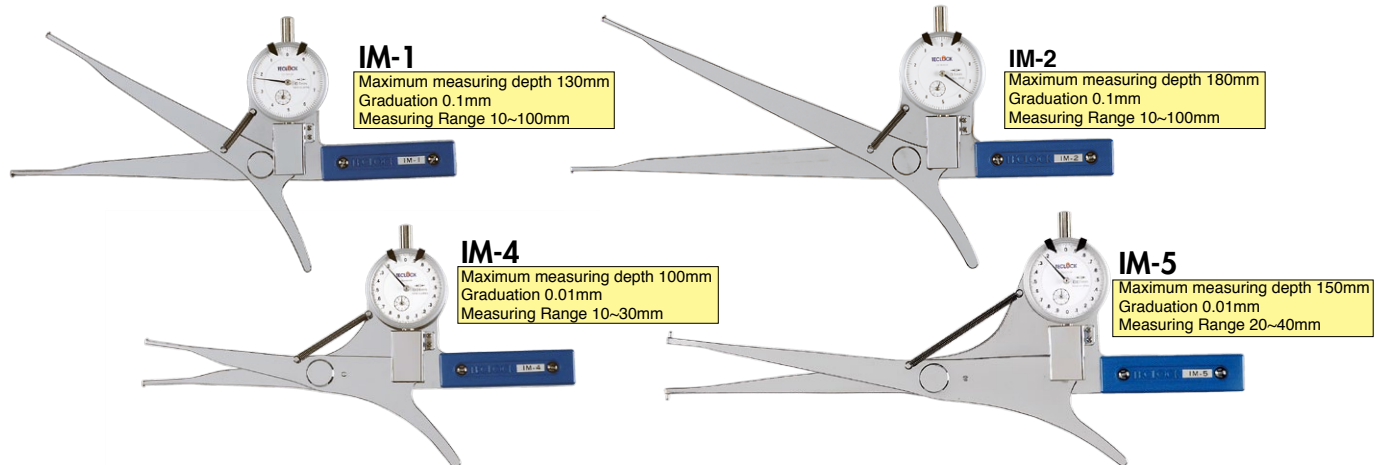

Specifications

Model	Graduation (mm)	Measuring Range (mm)	Indication Error (mm)	Maximum Measuring Depth (mm)	Contact Point Height (mm)	Measuring Force (N)	Weight (g)
IM-1	0.1	10~100	±0.1	130	2	5 or less	500
IM-2	0.1	10~100	±0.1	180	2	5 or less	620
IM-4	0.01	10~30	±0.02	100	2	5 or less	500
IM-5	0.01	20~40	±0.02	150	4	5 or less	600

Internal size of workpiece is 10mm, 15mm, 20mm and 30mm or over against measuring applicable depth.

Measuring applicable depth	Internal Size			
	10	15	20	30~
Model				
IM-1	35	50	80	130
IM-2	35	50	80	180
IM-4	35	50	80	100
IM-5	-	-	140	150

Internal size
unit : mm

Inside of workpiece should be straight or round shape without step etc.



I have to measure the inner diameter of small metal parts.




Dial Depth Gauge

- Internal caliper gauge to measure internal diameter of cylindrical workpiece and recessed groove diameter. It can measure groove diameter of "O" ring by modifying spare contact point.
- Set dimension within ±1mm (indication range 2mm) can be comparatively measured (880 series) by alternatively using auxiliary spare contact point in accordance with measured dimension.

- Please set standard dimension within measuring range with micrometer or ring gauge.

IM-880

Maximum Measuring Depth 70mm
Graduation 0.01mm
Measuring Range 20~35mm

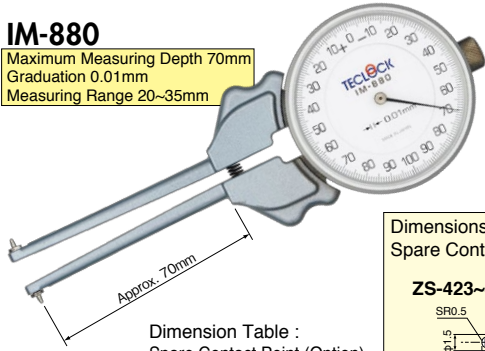


Dimension Table : Spare Contact Point (Option)

Code No.	L1	L2	Measuring Range
ZS-423	2.5	4	20-23
ZS-424	3.5	5	22-25
ZS-425	4.5	6	24-27
ZS-426	5.5	7	26-29
ZS-427	5.5	8	28-31
ZS-428	5.5	9	30-33
ZS-429	5.5	10	32-35


unit : mm

Dimensions : Spare Contact Point (Option)

ZS-423~427




ZS-428,429



unit : mm

IM-881

Maximum Measuring Depth 75mm
Graduation 0.01mm
Measuring Range 30~62mm

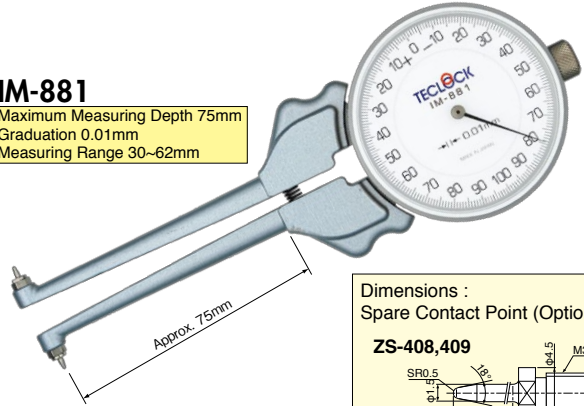


Dimension Table : Spare Contact Point (Option)

Code No.	L1	L2	Measuring Range
ZS-408	3	4.5	30-38
ZS-409	5.5	7.5	36-44
ZS-410	6	10.5	42-50
ZS-411	6	13.5	48-56
ZS-412	6	16.5	54-62


unit : mm

Dimensions : Spare Contact Point (Option)

ZS-408,409




ZS-410~412



unit : mm

IM-882

Maximum Measuring Depth 90mm
Graduation 0.01mm
Measuring Range 55~153mm

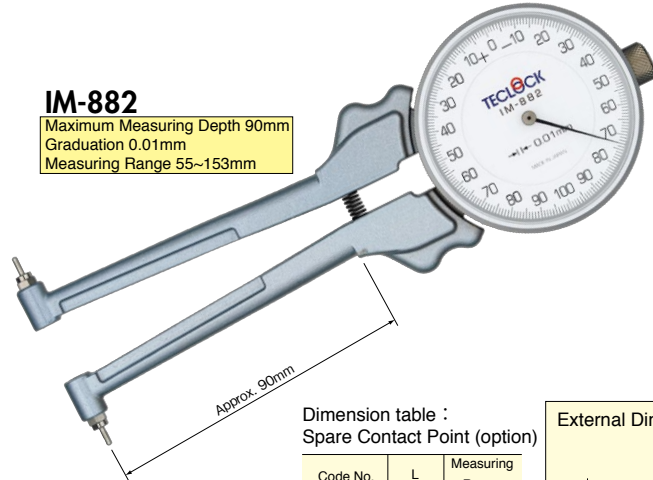


Dimension table : Spare Contact Point (option)

Code No.	L	Measuring Range
ZS-413	7	55~73
ZS-414	15	71~89
ZS-415	23	87~105
ZS-416	31	103~121
ZS-417	39	119~137
ZS-418	47	135~153


unit : mm

Dimensions : Spare Contact Point (Option)


ZS-413



ZS-414




ZS-415~418



unit : mm


External Dimensions



Model	L
IM-880	165
IM-881	170
IM-882	183

unit : mm

Dimensions

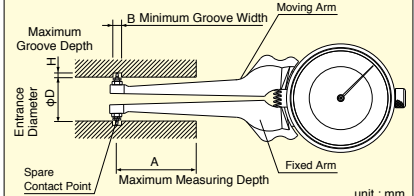

unit : mm



Specifications

Model	Graduation (mm)	Measuring Range (mm)	Indicating Range (mm)	Indication Error (μm)	Measuring Force (N)	Weight (g)	Spare Contact Point		Maximum Measuring Depth A (mm)	Entrance Diameter φD (mm)*	Groove Depth H (mm)	Minimum Groove Width B (mm)
							Code No.	Measuring Range (mm)				
IM-880	0.01	20-35	2	±20	3 or less	196	ZS-423	20-23	70		15-18	2.5
							ZS-424	22-25			15-18	3.5
							ZS-425	24-27			16-19	4
							ZS-426	26-29			18-21	4
							ZS-427	28-31			20-23	4
							ZS-428	30-33			22-25	4
							ZS-429	32-35			24-27	4
							ZS-408	30-38			24-32	3
IM-881	0.01	30-62	2	±20	3 or less	218	ZS-409	36-44	75		27.4-35.4	4.3
							ZS-410	42-50			33.4-41.4	4.3
							ZS-411	48-56			39.4-47.4	4.3
							ZS-412	54-62			45.4-53.4	4.3
							ZS-413	55-73			45-63	5
							ZS-414	71-89			54-72	8.5
IM-882	0.01	55~153	2	±20	3 or less	240	ZS-415	87~105	90		70-88	8.5
							ZS-416	103~121			86-104	8.5
							ZS-417	119~137			102-120	8.5
							ZS-418	135-153			118-136	8.5

*φD=Measuring Rang - 2H



One Revolution Internal Dial Caliper Gauge

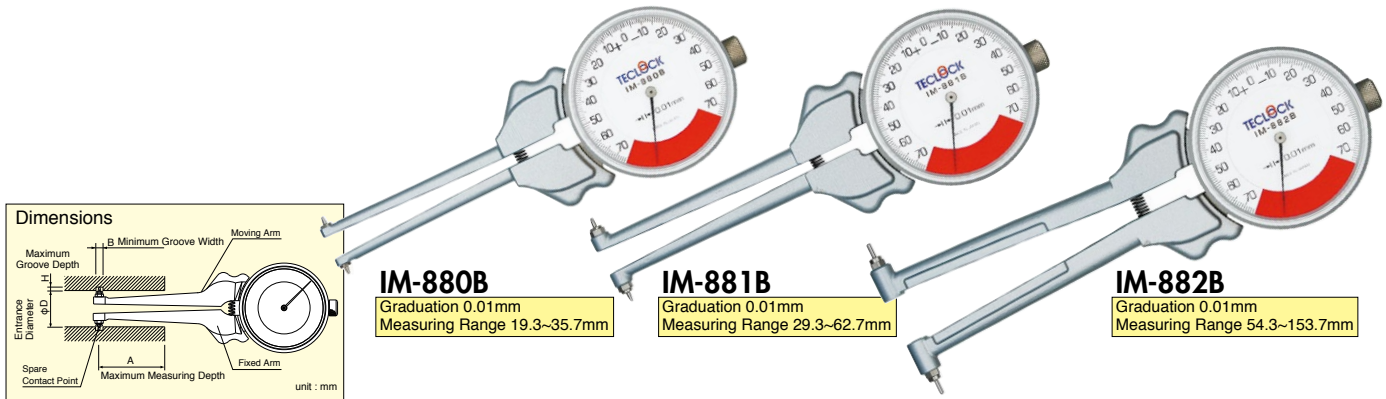

IM-880B
Graduation 0.01mm
Measuring Range 19.3~35.7mm

IM-881B
Graduation 0.01mm
Measuring Range 29.3~62.7mm

IM-882B
Graduation 0.01mm
Measuring Range 54.3~153.7mm



Specifications

Model	Graduation (mm)	Measuring Range (mm)	Indicating range (mm)	Indication Error (μm)	Measuring Force (N)	Spare Contact Point			Maximum Measuring Depth A (mm)	Entrance Diameter ϕD (mm)*	Groove Depth H (mm)	Groove Width B (mm)	Weight (g)	
						Code No.	Extension Rods	Measuring Range (mm)						
IM-880B	0.01	20~35	1.4	±20	3 or less	ZS-423	ZS-423	-	19.3~20.7	70	14.3	2.5	2.5	196
						ZS-423	ZS-424	-	20.3~21.7		15.3	2.5		
						ZS-424	ZS-424	-	21.3~22.7		14.3	3.5		
						ZS-424	ZS-425	-	22.3~23.7		15.3	3.5		
						ZS-425	ZS-425	-	23.3~24.7		15.3	4		
						ZS-425	ZS-426	-	24.3~25.7		16.3	4		
						ZS-426	ZS-426	-	25.3~26.7		17.3	4		
						ZS-426	ZS-427	-	26.3~27.7		18.3	4		
						ZS-427	ZS-427	-	27.3~28.7		19.3	4		
						ZS-427	ZS-428	-	28.3~29.7		20.3	4		
						ZS-428	ZS-428	-	29.3~30.7		21.3	4		
						ZS-428	ZS-429	-	30.3~31.7		22.3	4		
						ZS-429	ZS-429	-	31.3~32.7		23.3	4		
						ZS-426	ZS-426	ZS-646	32.3~33.7		24.3	4		
ZS-426	ZS-427	ZS-646	33.3~34.7	25.3	4									
ZS-427	ZS-427	ZS-646	34.3~35.7	26.3	4									
IM-881B	0.01	30~62	1.4	±20	3 or less	ZS-408	ZS-408	-	29.3~38.7	75	24	3	2.5	218
						ZS-409	ZS-409	-	35.3~44.7		27.4	4.3		
						ZS-410	ZS-410	-	41.3~50.7		33.4	4.3		
						ZS-411	ZS-411	-	47.3~56.7		39.4	4.3		
						ZS-412	ZS-412	-	53.3~62.7		45.4	4.3		
						ZS-413	ZS-413	-	54.3~73.7		45	5		
IM-882B	0.01	55~153	1.4	±20	3 or less	ZS-414	ZS-414	-	70.3~89.7	90	54	8.5	3.5	240
						ZS-415	ZS-415	-	86.3~105.7		70	8.5		
						ZS-416	ZS-416	-	102.3~121.7		86	8.5		
						ZS-417	ZS-417	-	118.3~137.7		102	8.5		
						ZS-418	ZS-418	-	134.3~153.7		118	8.5		

Optional Extension Rods

- IM-880 series dialcaliper gauges can measure internal dimension up to measuring range in the right list by installing extension rods. Standard products of spare extension rods can be used as it is.

Mounting Method of Spare Contact Point



IM-880:

Measuring range with extension rods (mm)

Spare Contact Point	Extension Rods	Measuring Range
ZS-423		34-37
ZS-424		36-39
ZS-425		38-41
ZS-426		40-43
ZS-427		42-45
ZS-428		44-47
ZS-429		46-49
ZS-423		48-51
ZS-424		50-53
ZS-425		52-55
ZS-426		54-57
ZS-427		56-59
ZS-428		58-61
ZS-429		60-63
ZS-423		62-65
ZS-424		64-67
ZS-425		66-69
ZS-426		68-71
ZS-427		70-73
ZS-428		72-75
ZS-429		74-77
ZS-423		76-79
ZS-424		78-81
ZS-425		80-83
ZS-426		82-85
ZS-427		84-87
ZS-428		86-89
ZS-429		88-91

IM-881:

Measuring range with extension rods (mm)

Spare Contact Point	Extension Rods	Measuring Range
ZS-408		60-68
ZS-409		66-74
ZS-410	ZS-693 L ₁₅	72-80
ZS-411		78-86
ZS-412		84-92
ZS-408		90-98
ZS-409		96-104
ZS-410	ZS-694 L ₃₀	102-110
ZS-411		108-116
ZS-412		114-122
ZS-408		120-128
ZS-409		126-134
ZS-410	ZS-695 L ₄₅	132-140
ZS-411		138-146
ZS-412		144-152

IM-882:


Measuring range with extension rods (mm)

Spare Contact Point	Extension Rods	Measuring Range
ZS-413		151-169
ZS-414		167-185
ZS-415		183-201
ZS-416		199-217
ZS-417		215-233
ZS-418		231-249
ZS-413		247-265
ZS-414		263-281
ZS-415		279-297
ZS-416		295-313
ZS-417		311-329
ZS-418		327-345




External Dial Caliper Gauge

- These gauges are designed for use in measuring external dimension of thick and large measuring work piece or special shape products which seem to be difficult to measure.
- Special order can be produced.

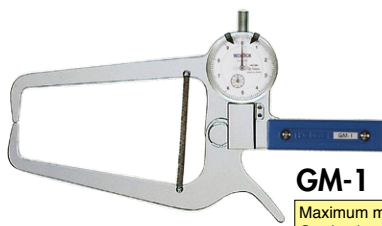

GM-1
Maximum measuring depth 125mm
Graduation 0.1mm
Measuring Range 0~90mm

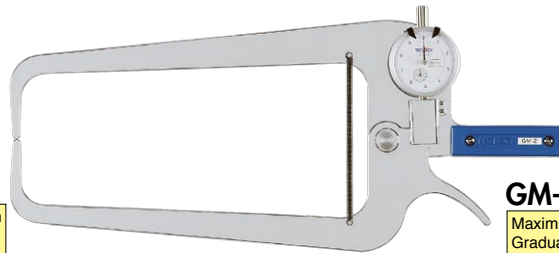


GM-2
Maximum measuring depth 250mm
Graduation 0.1mm
Measuring Range 0~90mm



GM-3
Maximum measuring depth 400mm
Graduation 0.1mm
Measuring Range 0~90mm




Overall length of GM-3 is large as 635mm.

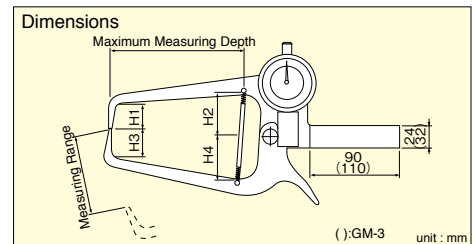


Dimension Table

Model	H ₁	H ₂	H ₃	H ₄
GM-1	25	40	25	40
GM-2	50	60	50	60
GM-3	60	70	60	80

unit : mm

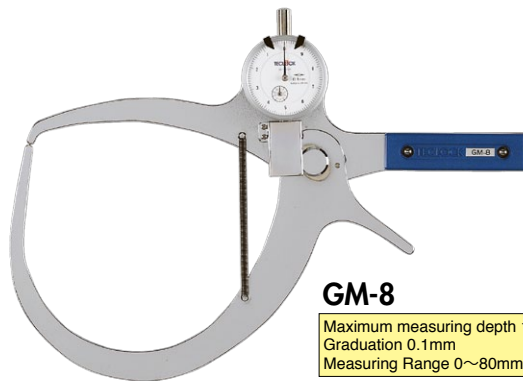

GM-8
Maximum measuring depth 130mm
Graduation 0.1mm
Measuring Range 0~80mm

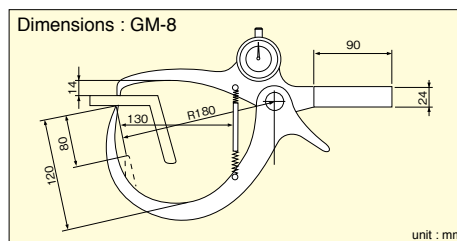

Specifications


Model	Graduation (mm)	Measuring Range (mm)	Indication Error (mm)	Maximum measuring depth (mm)	Measuring Force (N)	Weight (g)
GM-1	0.1	0~90	±0.1	125	5 or less	530
GM-2	0.1	0~90	±0.1	250	5 or less	800
GM-3	0.1	0~90	±0.2	400	10 or less	1,400
GM-8	0.1	0~80	±0.1	130	5 or less	550



Caliper Gauge

GM-9

Maximum measuring depth 100mm
Graduation 0.1mm
Measuring Range 0~30mm




GM-11

Maximum measuring depth 125mm
Graduation 0.1mm
Measuring Range 0~50mm




GM-20

Maximum measuring depth 125mm
Graduation 0.1mm
Measuring Range 0~80mm

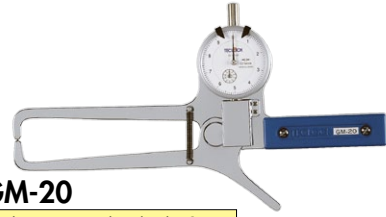



GM-21

Maximum measuring depth 220mm
Graduation 0.1mm
Measuring Range 0~90mm

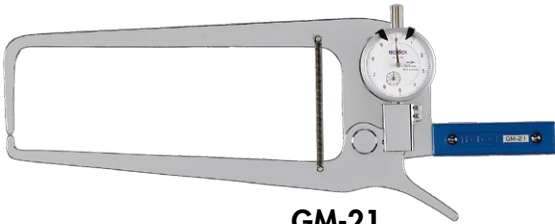

GM-22

Maximum measuring depth 250mm
Graduation 0.1mm
Measuring Range 0~90mm

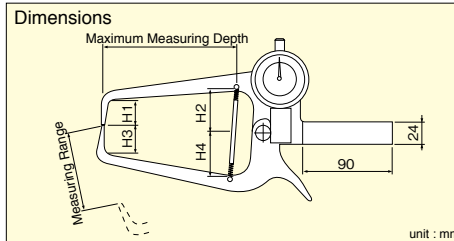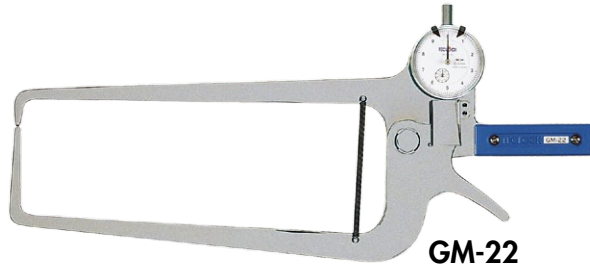

Dimension Table

Model	H ₁	H ₂	H ₃	H ₄
GM-9	2	12	2	12
GM-11	2	6	2	6
GM-20	17	11	17	11
GM-21	65	70	10	15
GM-22	20	25	65	70

unit : mm


Specifications

Model	Graduation (mm)	Measuring Range (mm)	Indication Error (mm)	Maximum Measuring Depth (mm)	Measuring Force (N)	Weight (g)
GM-9	0.1	0~30	±0.1	100	5 or less	460
GM-11	0.1	0~50	±0.1	125	5 or less	480
GM-20	0.1	0~80	±0.1	125	5 or less	500
GM-21	0.1	0~90	±0.1	220	5 or less	660
GM-22	0.1	0~90	±0.1	250	5 or less	720


Usage Example

Internal Caliper Gauge


Internal dimension of deep position can be easily measured. (maximum measuring depth 180mm=IM-2)



Groove diameter of groove for "O" ring can be easily measured. (IM-808,IM-880 etc)




Measurement evading from screw, nuts etc. can be made.




External Caliper Gauge


Thickness of long distance position of board shape workpiece can be measured. (maximum measuring depth 400mm=GM-3)



Thickness measurement in narrow area. (GM-9,GM-11)



It can measure evading obstacles in front of measuring point. (GM-8,GMD-8J)





External Digital Caliper Gauge


- External dimension measuring instrument of which digital gauge is built into frame. This can treat statistics data and print out it by connecting it to the optional exclusive printer SD-765P (Please refer to page 30).
- It is possible to equip print out switch (Option).




GMD-1J
 Maximum measuring depth 125mm
 Graduation 0.1mm
 Measuring Range 0~90mm



GMD-2J
 Maximum measuring depth 250mm
 Graduation 0.1mm
 Measuring Range 0~90mm

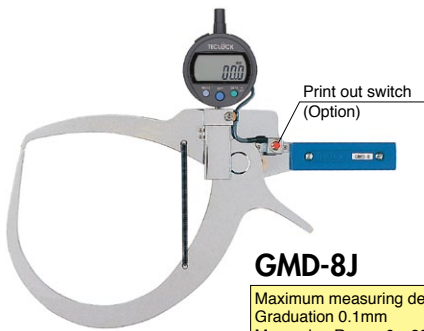


GMD-8J
 Maximum measuring depth 130mm
 Graduation 0.1mm
 Measuring Range 0~80mm

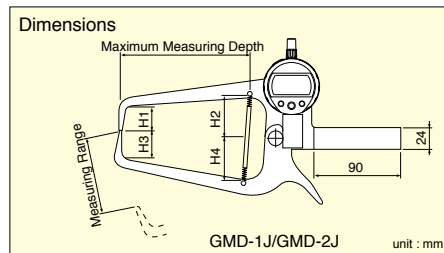

Dimension Table

Model	H ₁	H ₂	H ₃	H ₄
GMD-1J	25	40	25	40
GMD-2J	50	60	50	60

unit : mm

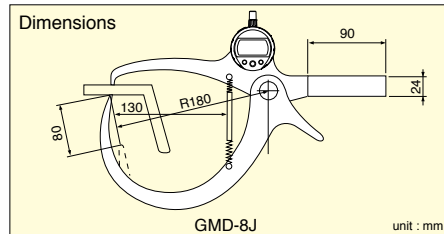

Printer (Option)
 Mini Printer for
 Digital Caliper Gauges SD-763P
 Connect cord ZE-018



Specifications




Model	Graduation (mm)	Measuring Range (mm)	Indication Error* (mm)	Maximum Measuring Depth (mm)	Measuring Force (N)	Weight (g)
GMD-1J	0.1	0~90	±0.1	125	5 or less	560
GMD-2J	0.1	0~90	±0.1	250	5 or less	830
GMD-8J	0.1	0~80	±0.1	130	5 or less	580

*The quantizing error function is not included.



Arm Slide Type Caliper Gauge

- Stable and accurate measuring dimension (comparative measurement) is possible for internal and external dimension, as this can well stick to workpiece with measurement method by sliding movable arm.
- Boxy type, easily to hold, lightweight and solid, this is suitable to inspect large volume at work site.
- This can be used for various objectives to measure internal gears, internal diameter female screw, plain gear, spline shaft of special key, over pin diameter of separation shaft and pitch gear thickness.
- Contact point is separately produced on demand such as ball type, flat type, knife edge type. Please advise dimension and shape.
- As Digital indicator is an option, please select it according to an objective. Because dial indicator can be installed.
- This can print out data by connected to Digital mini printer SD-763P (option).

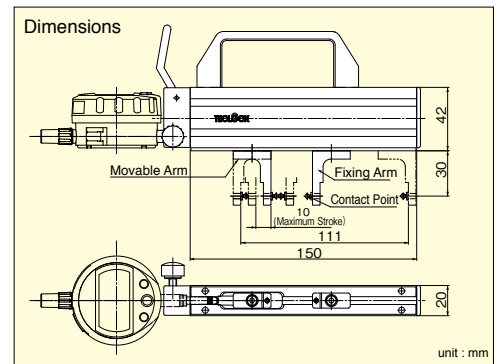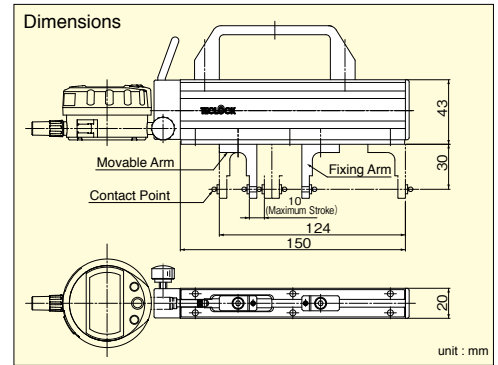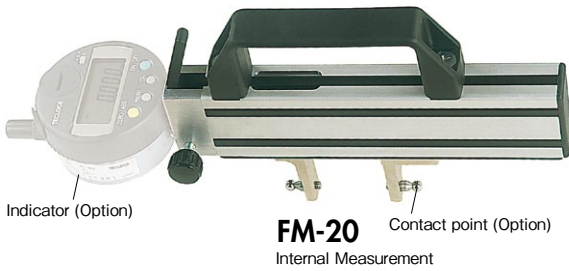

Groove internal diameter is comparatively measured by using Digital indicator with 0.001mm resolution

Specifications

Model	Application	Measuring Range (mm)	Arm Length (mm)	Measuring Force (N)	Fitting Holes (mm)	Weight (g)
FM-20	Internal	20~130	30	7~9	φ3.5	380
FM-25	External	0~100	30	7~9	φ3.5	380

Contact point and digital indicator are not included.